RISERLINING

Renew your vertical pipes. Keep every tile.

Drain and waste stack rehabilitation from the inside, for hotels and residential buildings.

Southeast Asia

THE PROBLEM

Ageing stacks hide behind your best finishes

Leaks and odours

Corroded and cracked vertical pipes cause water damage, smells and guest or resident complaints.

Costly repairs

The usual fix means opening walls and ceilings, then rebuilding tiles, bathrooms and kitchens.

Lost time

Rooms closed for weeks, residents disturbed, dust and noise across every floor.

OUR APPROACH

A new inner wall, without opening walls.

A technique already used in Europe, still rare in Southeast Asia. We clean vertical drain and waste stacks, then brush resin onto the inside wall, through existing access points, so in most cases there are no walls to open and no tiles to break.

WHAT THE RESIN LINING DOES

What a renewed stack brings

Seals holes and cracks

Restores a watertight pipe from the inside.

Stops micro-leaks

Including slow leaks that are not visible yet.

Reduces odours

Seals the cracks that let sewer smells escape into rooms.


Fewer blockages

A smooth wall where deposits build up much less.


FOR HOTELS

Keep your rooms open and earning

- Rooms are out of service for a short time, not weeks
- Bathrooms, marble and tiles stay untouched
- Toilets and drains stay connected, nothing to remove
- Work planned floor by floor, around your occupancy
- Low noise and dust, so guests stay comfortable

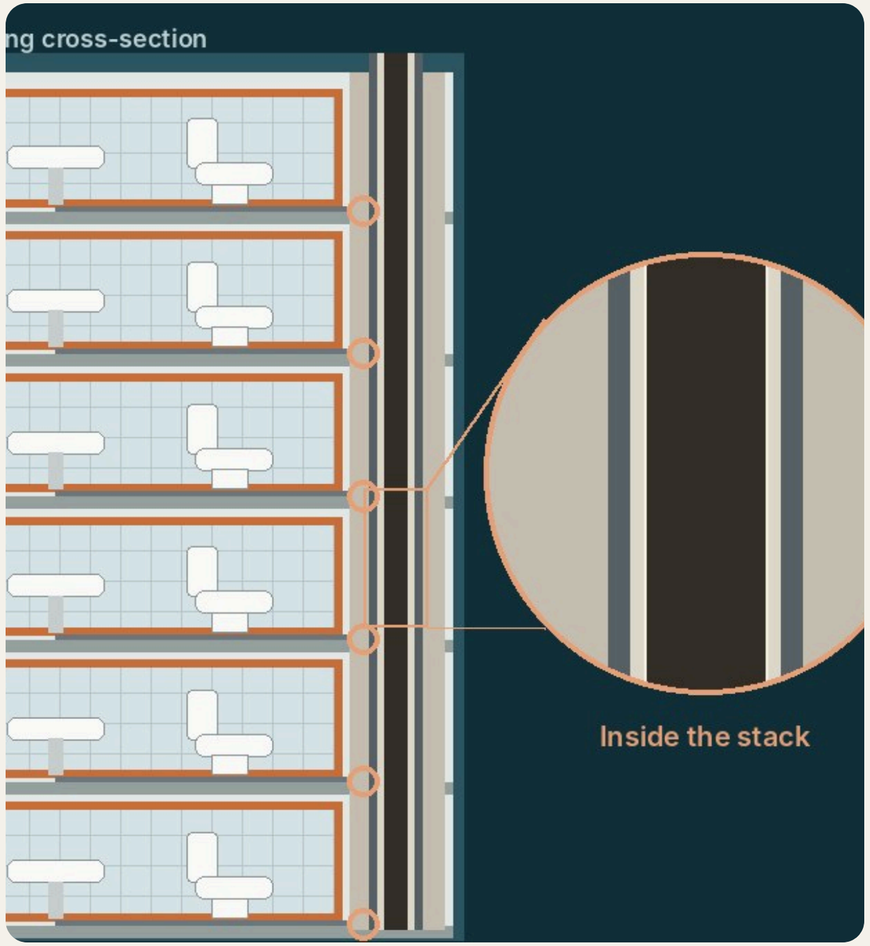

The stack is coated from inside, every bathroom keeps its tiles

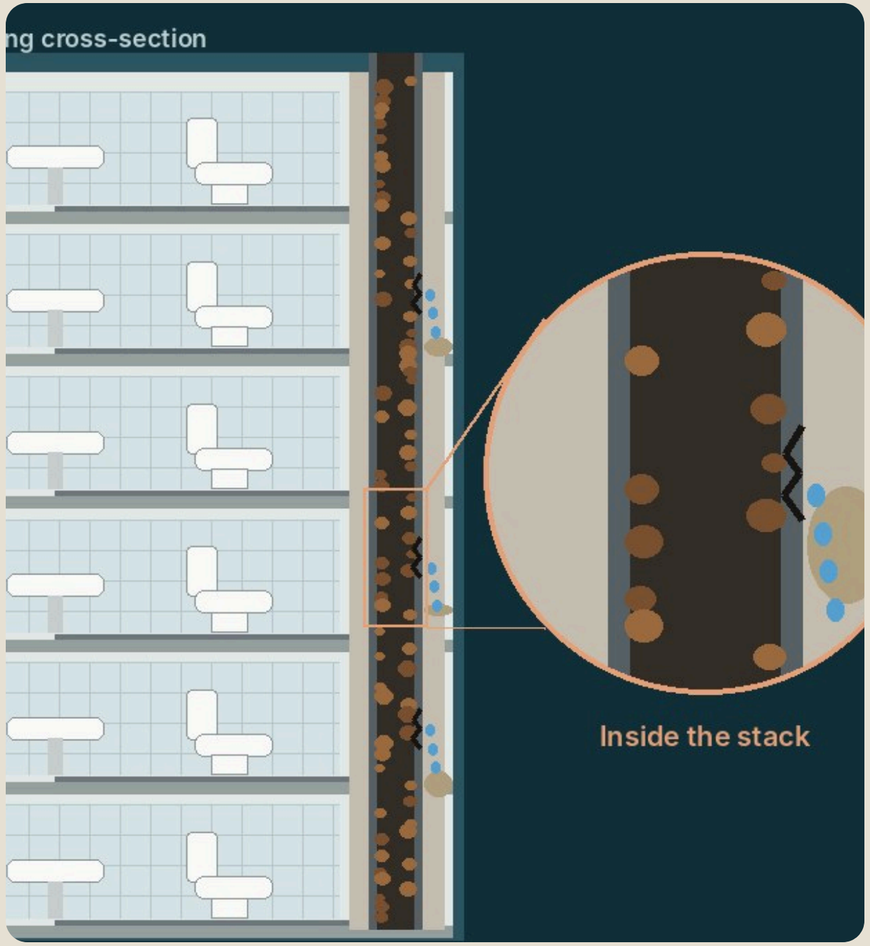

An ageing stack: deposits, cracks and slow leaks

FOR CONDOMINIUMS AND LANDLORDS

Residents stay home. Budgets stay in control.

- No need to move residents out during the works
- No rebuilding of private bathrooms and kitchens
- One clear quote, based on a camera inspection
- A solution that fits the building’s maintenance plan

HOW WE WORK

Four steps, fully documented

01

Inspect

Camera survey of the stacks and a written report with video.

02

Clean

The pipes are cleared of deposits and prepared.

03

Renew

Resin is brushed onto the inside wall, floor by floor.

04

Verify

Final camera check, with before and after footage for your records.

THE DIFFERENCE

Replacement versus renewal

	Traditional replacement	RiserLining
Walls and tiles	Opened, then rebuilt	Left in place in most cases
Rooms or homes	Out of use for weeks	Short interruptions
Noise, dust, debris	High	Low
Extra trades needed	Tiler, plasterer, painter	Rarely needed
Proof of result	Visual only	Before and after camera footage

WHO WE ARE

European field experience, now in Asia


RiserLining is a new company founded by a field technician and team leader specialised in the rehabilitation of vertical pipes in occupied buildings in France.

OUR FOUNDER'S TRACK RECORD IN FRANCE


30
buildings, 3 to 11 storeys

270
stacks renewed

4,800+
metres of pipe

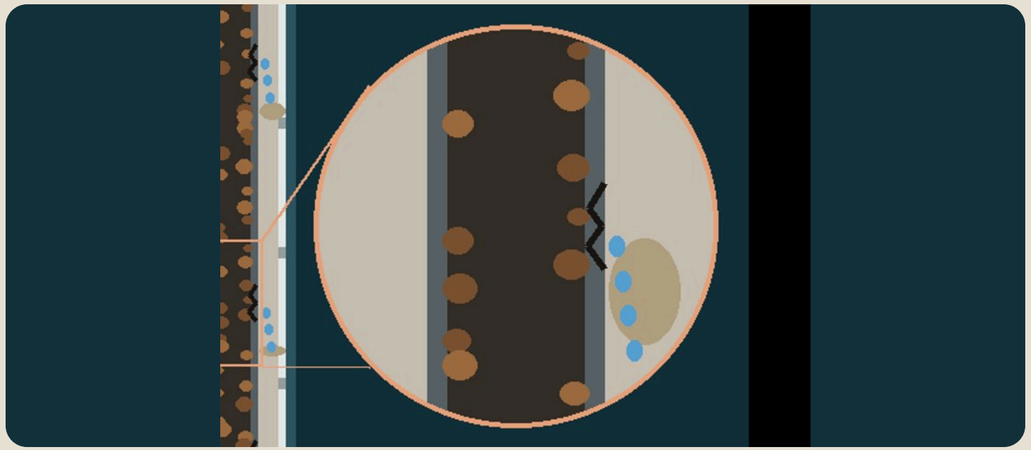

BEFORE

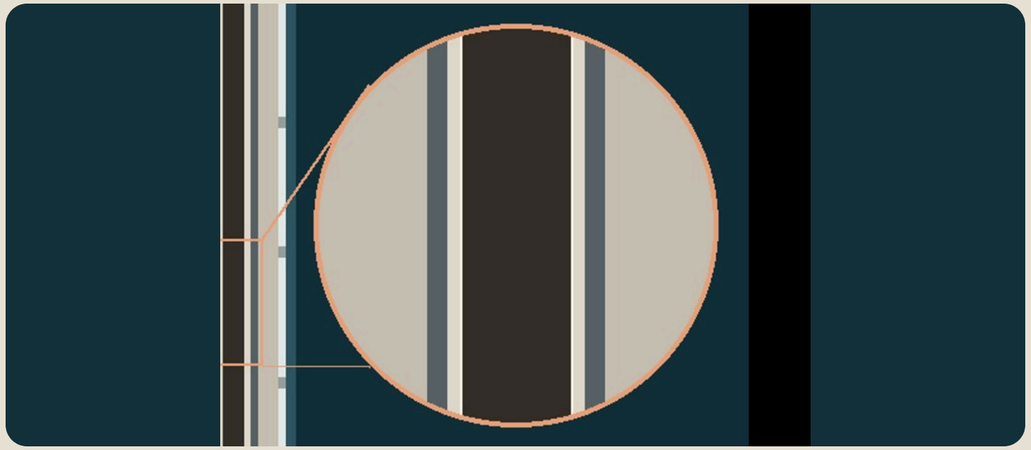

AFTER

LET’S TALK

Let’s test it on one of your stacks: free camera inspection during our visit

We will be in Southeast Asia in early 2027 to meet hotels, building managers and partners. Reply to book a 30-minute meeting and an on-site camera inspection, with no commitment.

contact@riserlining.com